

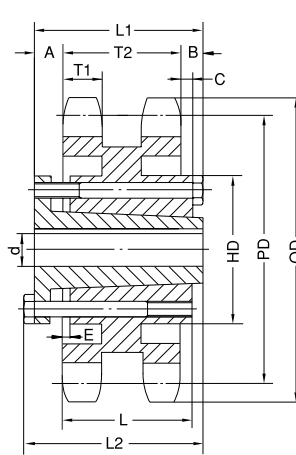


Q-BUSHED SPROCKETS



Type C5

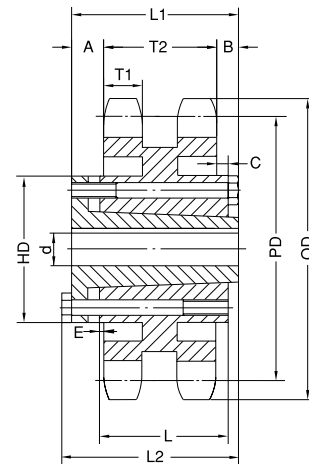

Type C6

No.120 Double Q-Bushed

No. of Teeth	Part No.	Type	Bushing	OD	PD	Max. Bore d	L1	L2	HD	A	B	C	E	L	T1	T2	App. Wt. (Lbs.)	
																	With Hub	Sprocket
30	D120J30	C5	J	15.170	14.350	4-7/16	4-1/2	5	7-1/4	1-1/32	25/32	21/32	5/32	3-3/16	0.894	2.683	97.5	78.0
35	D120J35	C5	J	17.570	16.734	4-7/16	4-1/2	5	7-1/4	1-1/32	25/32	21/32	5/32	3-3/16	0.894	2.683	112.0	93.0
45	D120J45	C5	J	22.350	21.502	4-7/16	4-1/2	5	7-1/4	1-1/32	25/32	21/32	5/32	3-3/16	0.894	2.683	157.0	138.0
60	D120M60	C6	M	29.520	28.661	5-1/2	6-3/4	7-1/4	9	2-9/32	1-25/32	1-21/32	27/32	5-3/16	0.894	2.683	271.0	234.0





No.140 Double Q-Bushed

No. of Teeth	Part No.	Type	Bushing	OD	PD	Max. Bore d	L1	L2	HD	A	B	C	E	L	T1	T2	App. Wt. (Lbs.)	
																	With Hub	Sprocket
35	D140J35	C5	J	20.490	19.523	4-7/16	4-1/2	5	7-1/4	31/32	23/32	19/32	7/32	3-3/16	0.894	2.818	137.0	128.0
45	D140J45	C5	J	26.080	25.087	4-7/16	4-1/2	5	7-1/4	31/32	23/32	19/32	7/32	3-3/16	0.894	2.818	195.0	176.0
60	D140M60	C6	M	34.440	33.438	5-1/2	6-3/4	7-1/4	9	2-7/32	1-23/32	1-19/32	25/32	5-3/16	0.894	2.818	339.0	302.0

No.160 Double Q-Bushed

No. of Teeth	Part No.	Type	Bushing	OD	PD	Max. Bore d	L1	L2	HD	A	B	C	E	L	T1	T2	App. Wt. (Lbs.)	
																	With Hub	Sprocket
35	D160M35	C6	M	23.420	22.312	5-1/2	6-3/4	7-1/4	9	2-3/64	1-9/32	1-5/32	39/64	5-3/16	1.119	3.424	259.0	222.0
45	D160N45	C6	N	29.800	28.671	6	8-1/8	8-5/8	10	2-11/32	2-23/64	2-5/32	21/32	6-1/4	1.119	3.424	377.0	340.0
60	D160N60	C6	N	39.360	38.215	6	8-1/8	8-5/8	10	2-11/32	2-23/64	2-5/32	21/32	6-1/4	1.119	3.424	509.0	472.0

Q-STYLE BUSHINGS



JA-J Bushings

M-W Bushings

Part No.	A	D	OD	B	F	G	L	D1	Hexhead Bolt		d			Setscrew	App. Wt. (Lbs.)
									No.	Size	Minimum	Maximum			
												Standard Keyway	Shallow Keyway		
JA	3/8	1.375	2	11/16	9/16	1/8	1-1/16	1.665	3	10 × 1	3/8	1	1-1/4	10-24	0.9
SH	7/16	1.871	2-11/16	7/8	13/16	3/16	1-5/16	2-1/4	3	1/4 × 1-3/8	1/2	1-3/8	1-11/16	1/4	1.0
SDS	1/2	2.187	3-3/16	7/8	3/4	3/16	1-3/8	2-11/16	3	1/4 × 1-3/8	1/2	1-11/16	2	1/4	1.0
SD	1/2	2.187	3-3/16	1-5/16	1-1/4	3/16	1-13/16	2-11/16	3	1/4 × 1-7/8	1/2	1-11/16	1-15/16	1/4	1.5
SK	9/16	2.812	3-7/8	1-3/8	1-1/4	3/16	1-15/16	3-5/16	3	5/16 × 2	1/2	2-1/8	2-1/2	5/16	2.0
SF	9/16	3.125	4-5/8	1-1/2	1-1/4	1/4	2-1/16	3-7/8	3	3/8 × 2	1/2	2-5/16	2-13/16	5/16	3.0
E	3/4	3.834	6	1-7/8	1-5/8	5/16	2-5/8	5	3	1/2 × 2-3/4	7/8	2-7/8	3-1/2	3/8	10.0
F	13/16	4.437	6-5/8	2-13/16	2-1/2	3/8	3-5/8	5-5/8	3	9/16 × 3-5/8	1	3-5/16	3-15/16	1/2	11.5
J	1	5.148	7-1/4	3-1/2	3-3/16	3/8	4-1/2	6-1/4	3	5/8 × 4-1/2	1-7/16	3-3/4	4-1/2	5/8	18.0
M	1-1/4	6.500	9	5-1/2	5-3/16	3/8	6-3/4	7-7/8	4	3/4 × 6-3/4	1-15/16	4-3/4	5-1/2	3/4	37.0
N	1-1/2	7.000	10	6-5/8	6-1/4	7/16	8-1/8	8-1/2	4	7/8 × 8-1/2	2-7/16	5-1/8	6	3/4	57.0
P	1-3/4	8.250	11-3/4	7-5/8	7-1/4	1/2	9-3/8	10	4	1 × 9-1/2	2-15/16	5-15/16	7	7/8	120.0
W	2	10.437	15	9-3/8	9	1/2	11-3/8	12-3/4	4	1-1/8 × 11-1/2	4	7-1/2	8-1/2	1	250.0

The taper on all Q-Style Bushings is 3/4" per foot on diameter.